


Quartz Crystal


HC-49/U

model	KX-49T
frequency	1,84320 MHz
mode	fundamental
operating temperature	-40° ~ + 85°C
frequency tolerance at +25°C	30 ppm
temperature tolerance at -40° ~ + 85°C	50 ppm
load capacitance C_L	30 pF
series resonance R_1 max.	600 Ohm
aging at +25°C (first year) max.	± 5 ppm
shunt capacitance C_0 max.	7 pF
drive level mW max	0,5 ~ 2
RoHS	according to RoHS 2011/65/EU
order no.	12.81175


Dimensions (mm):

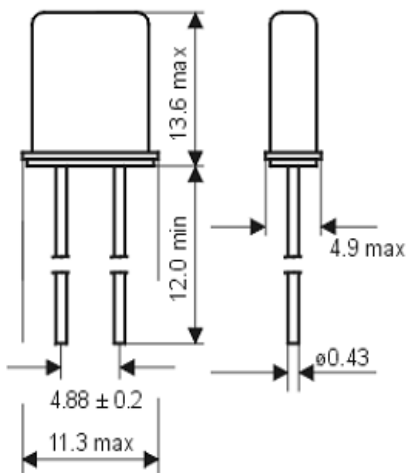

Wave soldering condition:

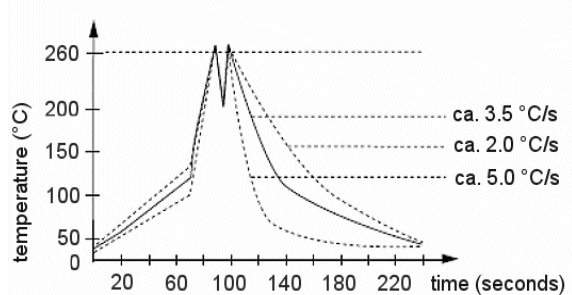

Tape specification:

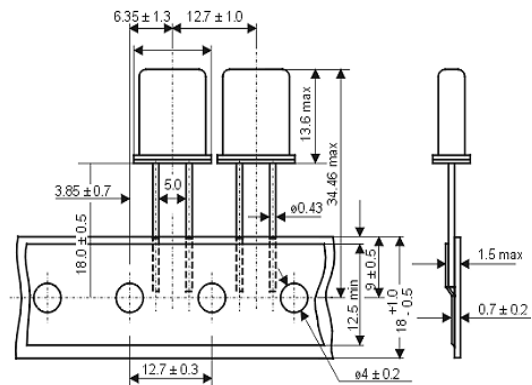

Taped crystals upon request