



- 3-Terminal Regulators
- Output Current up to 100 mA
- No External Components
- Internal Thermal-Overload Protection
- Internal Short-Circuit Current Limiting
- Direct Replacements for Fairchild μ A78L15 Series

description

This series of fixed-voltage integrated-circuit voltage regulators is designed for a wide range of applications. These applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used with power-pass elements to make high-current voltage regulators. One of these regulators can deliver up to 100 mA of output current. The internal limiting and thermal-shutdown features of these regulators make them essentially immune to overload. When used as a replacement for a zener diode-resistor combination, an effective improvement in output impedance can be obtained, together with lower bias current.



SOT-89
78L15CPK

electrical characteristics at specified virtual junction temperature, $V_I = 23V$, $I_O = 40mA$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T ‡	78L15			UNIT
			MIN	TYP	MAX	
Output voltage	$I_O = 1mA$ to $40mA$, $V_I = 17.5$ to $30V$	$25^\circ C$	14.4	15	15.6	V
		Full range	14.25	15	15.75	
		Full range	14.25	15	15.75	
Input voltage regulation	$V_I = 17.5V$ to $30V$	$25^\circ C$		65	300	mV
	$V_I = 19V$ to $30V$			58	250	
Ripple rejection	$V_I = 18.5V$ to $28.5V$, $f = 120$ Hz	$25^\circ C$	34	39		dB
Output voltage regulation	$I_O = 1$ mA to 100 mA	$25^\circ C$		25	150	mV
	$I_O = 1$ mA to 40 mA			15	75	
Output noise voltage	$f = 10$ Hz to 100 kHz	$25^\circ C$		82		μV
Dropout voltage		$25^\circ C$		1.7		V
Bias current		$25^\circ C$		4.6	6.5	mA
		$125^\circ C$			6	
Bias current change	$V_I = 19V$ to $30V$	Full range			1.5	mA
	$I_O = 1$ mA to 40 mA				0.1	

‡ Pulse-testing techniques maintain T_J as close to T_A as possible. Thermal effects must be taken into account separately. All characteristics are measured with a $0.33\text{-}\mu F$ capacitor across the input and a $0.1\text{-}\mu F$ capacitor across the output. Full range for the 78L05 is $T_J = 0^\circ C$ to $70^\circ C$

WS 78L15


absolute maximum ratings over operating temperature range (unless otherwise noted)

78L15	PARAMETER	UNIT
Input voltage, V_I	35	V
Virtual junction temperature range, T_J	150	°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260	°C
Storage temperature range, T_{stg}	-65 to 150	°C

recommended operating conditions

78L15	MIN	MAX	UNIT
Input voltage, V_I	17.5	30	V
Output current, I_O		100	mA
Operating virtual junction temperature, T_J	0	70	°C

Pad Location 78L15

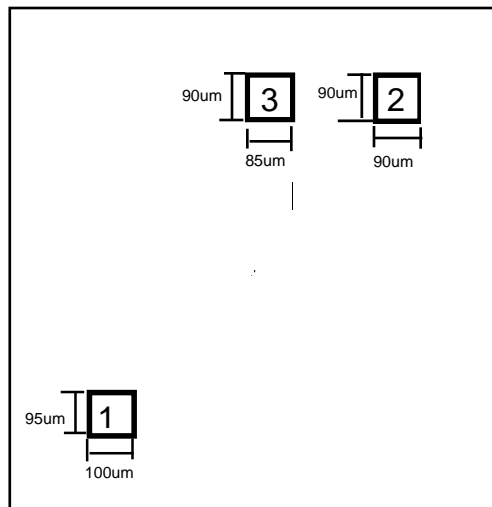

Chip size 1.0 x 1.2 mm

Pad N	Pad Name	X (um)	Y (um)
1	Ground	95	100
2	Input	820	1010
3	Output	535	1015

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.